

Takarmatur som är perfekt vid lägre takhöjder, då den endast bygger 100 mm ner från tak.

Utförande: Mörkgrå strukturlack. Skärm av matt opalglas alt. matt akryl.

Montage: Dikt tak.

Anslutning: Snabbkopplingsplint 5x4mm². Överkopplingsbar.

Utbytesöppningar för utanpåliggande kabel.

Design: Per Sundstedt.

W	SKÄRM/SHADE	KG	ART
1x18-24W/2G10	Glas/Glass	2,3	4065-1-21HF
24W/2G10	Glas/Glass	2,3	4065-1-21HFF
1x18-24W/2G10	Akryl/Acrylic	1,6	4065-1-27HF
24W/2G10	Akryl/Acrylic	1,6	4065-1-27HFF
1x18-24W/2G10	Glas/Glass	2,5	4165-1-21HF*
1x18-24W/2G10	Akryl/Acrylic	1,8	4165-1-27HF*

HFF = Dimmbart driftdon. Fördunklas via SwitcDIM alt. DSI.

HFF = Dimmable ballast. Tridonic ECO, dimmable with SwitchDIM.



* = Inbyggt nödljus 1 tim./With emergency light 1 h.

Finish: Dark-grey painted steel. Shade in matt opal glass or matt acrylic.

Installation: Ceiling-installation.

Connection: Snap-in terminal block 5x4mm². Two cable entries. Knockout for external mains cable.

Design: Per Sundstedt.

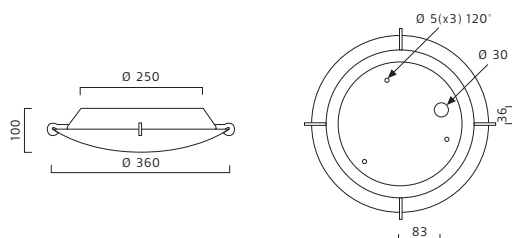

HFF & Nödljus/HFF & Emergency

