


**KITCHEN SINK FAUCET
K-15172**

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- 2.2 gpm (8.3 lpm) flow rate
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Lever or loop handle
- Handspray
- Available with an 8-1/2" (21.6 cm), 10" (25.4 cm), or 12" (30.5 cm) swing spout
- 22" (55.9 cm) long stainless steel flexible hose connections

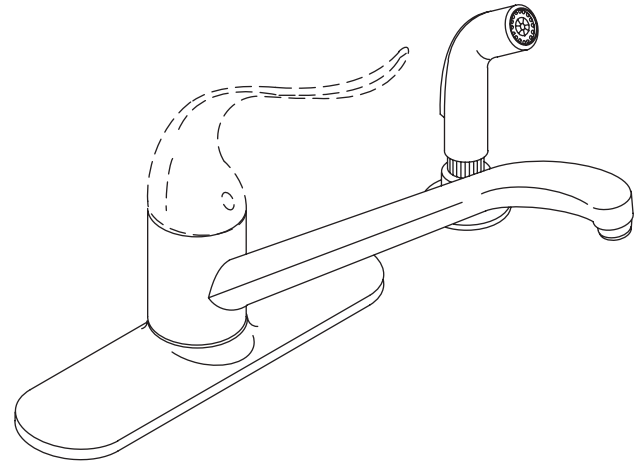

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)

Colors/Finishes

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	ADA			ADA		
K-15172-F	Kitchen sink faucet with 8-1/2" (21.6 cm) swing spout	<input type="checkbox"/> CP					
K-15172-FT	Kitchen sink faucet with 10" (25.4 cm) swing spout	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other____			
K-15172-FL	Kitchen sink faucet with 10" (25.4 cm) swing spout	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other____			
K-15172-FG	Kitchen sink faucet with 12" (30.5 cm) swing spout				<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other____


Note: All faucets, except white and polished brass, come with a chrome handspray. White and polished brass faucets come with a white handspray.

Optional Accessories on Page 2.

Product Specification


Single-control kitchen sink faucet shall be of metal construction. Valve shall be a one-piece, self-contained ceramic disc valve, which allows volume and temperature control. Valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Faucet shall include 8-1/2" (21.6 cm), 10" (25.4 cm), or 12" (30.5 cm) swing spout, lever or loop handle, and handspray. Faucet shall include 22" (55.9 cm) long stainless steel flexible hose connections. Faucet shall be rated at 2.2 gallons (8.3 L) per minute. Faucet shall have lower flow aerator options. Faucet shall be Kohler Model K-15172-_____-_____.

CORALAIS®

Model	Optional Accessories			
K-15179-A	12" (30.5 cm) swing spout and aerator	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____

Installation Notes

Install this product according to the installation guide.

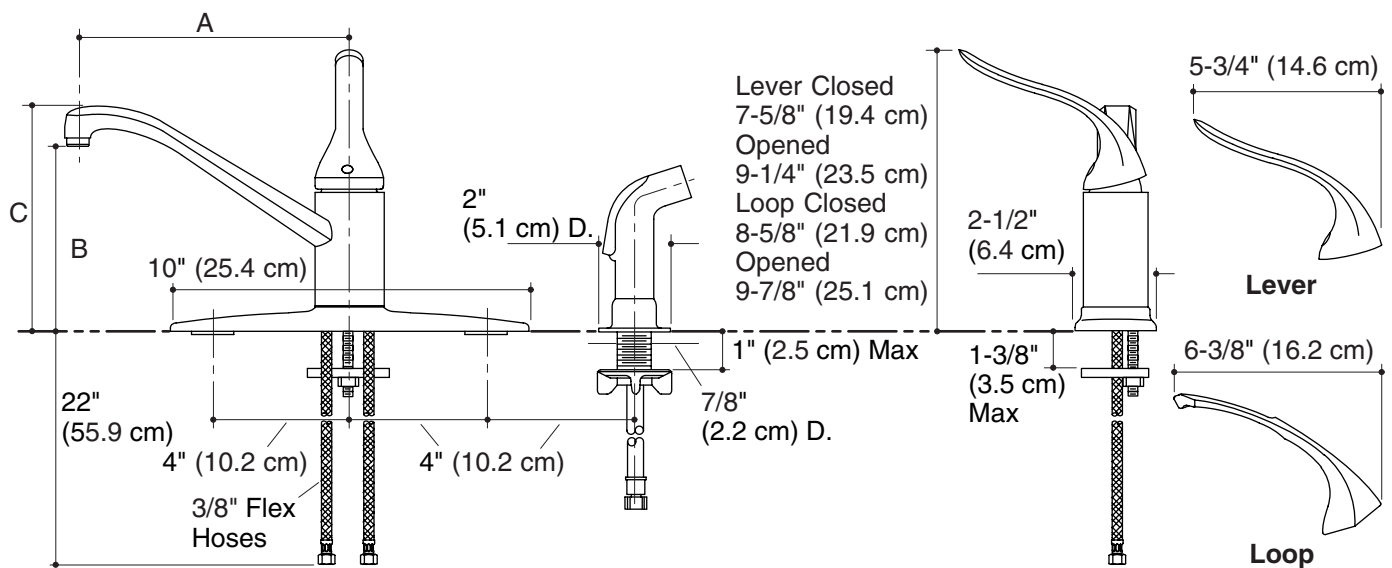

	A	B	C
K-15172-F	8-1/2" (21.6 cm)	5-1/8" (13 cm)	6-1/4" (15.9 cm)
K-15172-FT, K-15172-FL	10" (25.4 cm)	6-1/4" (15.9 cm)	7-1/4" (18.4 cm)
K-15172-FG	12" (30.5 cm)	6-5/16" (16 cm)	7-5/16" (18.6 cm)

Product Diagram